



## Yuasa Ficha Técnica

### Yuasa 404 - Clasica

#### Rendimiento

|                                   |      |
|-----------------------------------|------|
| Tensión                           | 6V   |
| Capacidad (20 horas)              | 77Ah |
| Capacidad Arranque Amperios (EN1) | 360A |

#### Dimensiones

|       |       |
|-------|-------|
| Largo | 218mm |
| Ancho | 170mm |
| Alto  | 190mm |

#### Peso

|                  |            |
|------------------|------------|
| Peso con Acido   | 12.7kg     |
| Volumen de acido | 3.0 Litros |

#### Características

|          |                 |
|----------|-----------------|
| Fijación | B12             |
| Sellada  | Enchufe elevado |

#### Tecnología


|                     |             |
|---------------------|-------------|
| Tecnología          | Sb/Sb       |
| Separadores         | PE          |
| Carga recomendada   | 4A          |
| Performance Marking | W1-C1-V1-E1 |



#### Tipo de terminal

##### T1


Standard DIN Post

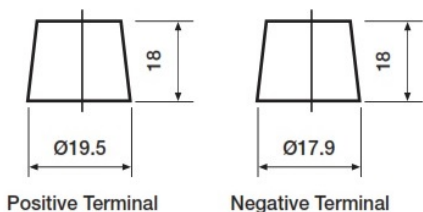

Positive Terminal


Negative Terminal

#### Esquema



#### Fijación

##### B12

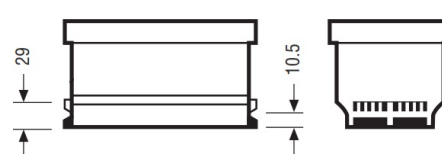

Fecha de emisión: 14/04/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa 404 - Classic Vehicle Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 6V   |
| Capacity (20-hour)       | 77Ah |
| Cold Cranking Amps (EN1) | 360A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 218mm |
| Width  | 170mm |
| Height | 190mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 12.7kg     |
| Acid Volume           | 3.0 litres |



#### Container Features

|           |             |
|-----------|-------------|
| Hold Down | B12         |
| Lid Type  | Raised Plug |

#### Technology

|                         |             |
|-------------------------|-------------|
| Technology              | Sb/Sb       |
| Separator               | PE          |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W1-C1-V1-E1 |

#### Terminal Type

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Cell Assembly Layout

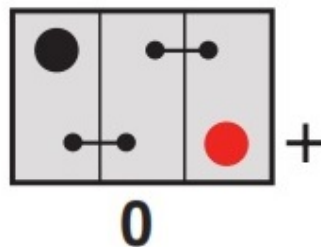

#### Battery Hold-down

##### B12

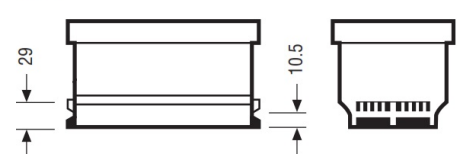

Data Sheet generated on 14/04/2024 - E&OE