


Especificaciones

Voltaje nominal (V)	6
5-hr rate Capacity to 1.75v per cell at 20°C (Ah)	215
Capacidad a 75A (mins)	145
Capacidad a 25A (mins)	530
20-hr de capacidad	260
1.75V/celda a 20°C (Ah)	


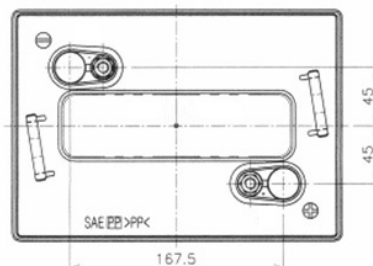


Capacidad a 5 HR por Temperatura

40°C	105%
30°C	100%
0°C	80%

Dimensiones


Largo (mm)	259
Ancho (mm)	179
Alto (mm)	264
Alto incluyendo terminales (mm)	295
Peso (Kg)	33

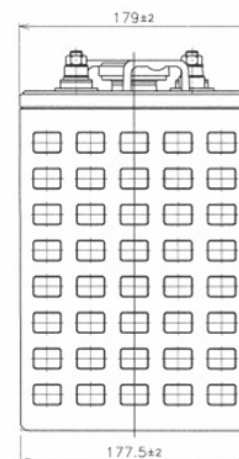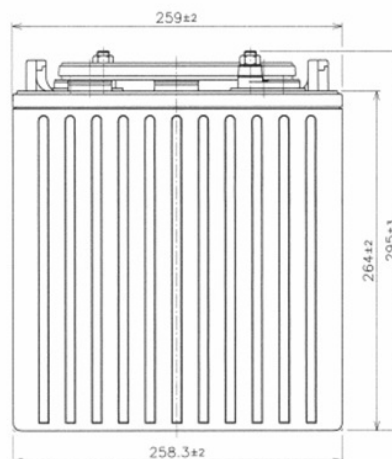


Especificaciones del material

Estilo de la tapa	: Desmontable - Posible mantenimiento
Estilo de la ventilación de la tapa	: Gang style
Material del contenedor y de la tapa	: Plástico de polipropileno negro.
Metodo de sellado de la tapa	: Termosellado
Tipo de conector entre celdas	: Soldadura mediante partición
Metodo de soldado de la placa de lengüeta	: Proceso de montaje automatizado
Material de rejilla positiva	: Aleación de plomo antimonio
Material de rejilla negativa	: Aleación de plomo antimonio

POSITIVE TERMINAL S=1:1

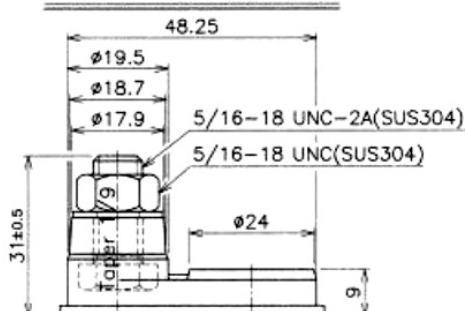

NEGATIVE TERMINAL S=1:1

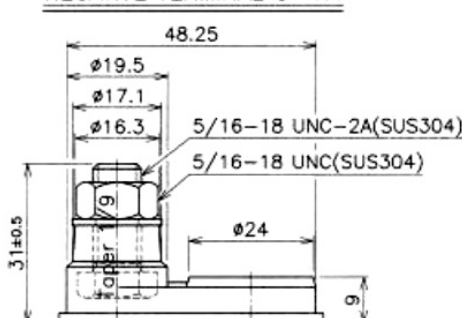

Fecha de emision: 19/04/2024 - E&EO

Yuasa Technical Data Sheet

Yuasa DCB145-6(ET) Pro-Spec Deep Cycle Battery



Specifications




Nominal voltage (V)	6
5-hr rate Capacity to 1.75v per cell at 20°C (Ah)	215
Capacity @ 75A (mins)	145
Capacity @ 25A (mins)	530
20-hr rate Capacity to 1.75V/Cell at 20°C (Ah)	260

5-Hr Capacity By Temperature

40°C	105%
30°C	100%
0°C	80%

Dimensions


Length (mm)	259
Width (mm)	179
Height (mm)	264
Height over terminals (mm)	295
Mass (kg)	33

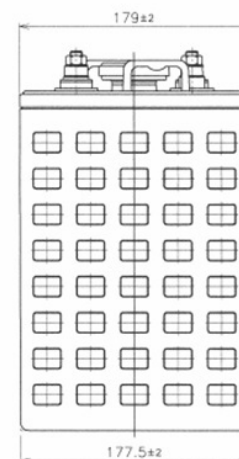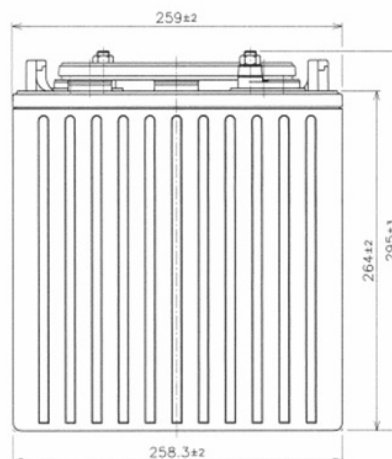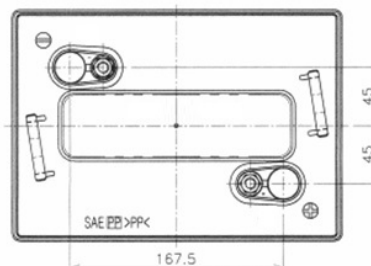


Material Specifications

Cover Style	: Removable - Maintenance Possible
Cover Vent Style	: Gang style
Container & Cover Material	: Black polypropylene plastic
Case to Cover Seal Method	: Heat sealing
Inner Cell Connector Type	: Through-partition weld
Plate Lug Weld Method	: Automated cast-on process
Positive Grid Material	: Antimony lead alloy
Negative Grid Material	: Antimony lead alloy

POSITIVE TERMINAL S=1:1

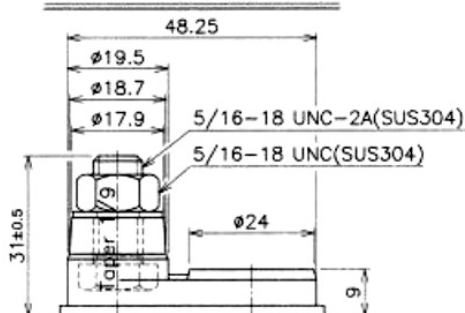

NEGATIVE TERMINAL S=1:1

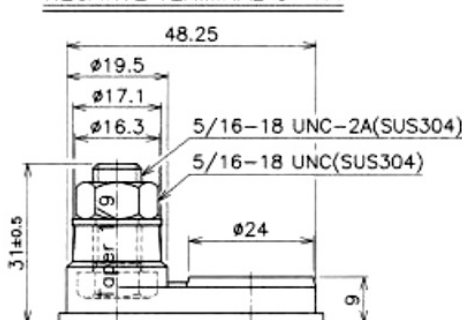

Data Sheet generated on 19/04/2024 - E&OE