



Yuasa Ficha Técnica

Yuasa YBX1063 - YBX1000 Calcio / Calcio

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

Tensión	12V
Capacidad (20 horas)	40Ah
Capacidad Arranque	360A
Amperios (EN1)	

Dimensiones

Largo	207mm
Ancho	175mm
Alto	175mm

Peso

Peso con Acido	11.4kg
Volumen de acido	3 Litros



Características

Tipo de Caja	LB1 DIN
Fijación	B13/B14
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	Ventilación central

Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Carga recomendada	2A
Performance Marking	W3-C2-V2-E1



Tipo de terminal

Esquema


Fijación

T1

Standard DIN Post

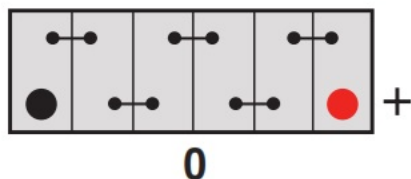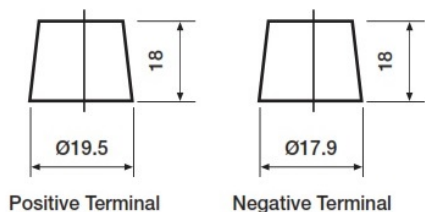

B3/B4 (B3 with Hold-Down adaptor)

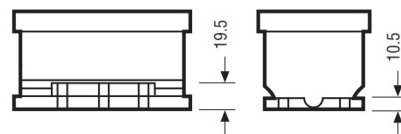

Fecha de emisión: 26/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX1063 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

Dimensions

Length	207mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	11.4kg
Acid Volume	3 litres



Container Features

Case Type	LB1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	2A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

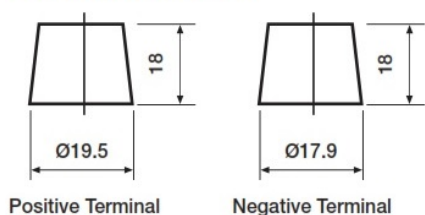


Cell Assembly Layout

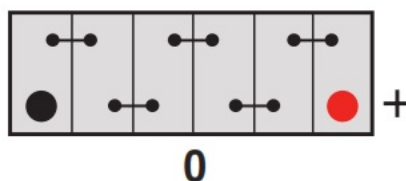

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

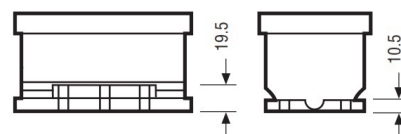

Data Sheet generated on 26/04/2024 - E&OE