



## Yuasa Ficha Técnica

### Yuasa YBX1625 - Super Heavy Duty Battery

#### Rendimiento

|                                   |       |
|-----------------------------------|-------|
| Tensión                           | 12V   |
| Capacidad (20 horas)              | 200Ah |
| Capacidad Arranque Amperios (EN1) | 1100A |

#### Dimensiones

|       |       |
|-------|-------|
| Largo | 513mm |
| Ancho | 274mm |
| Alto  | 242mm |



#### Peso

|                |      |
|----------------|------|
| Peso con Acido | 55kg |
|----------------|------|

#### Características

|              |                 |
|--------------|-----------------|
| Tipo de Caja | DIN C           |
| Borne        | 3               |
| Fijación     | N               |
| Asas         | ✓               |
| Sellada      | Enchufe elevado |


#### Tecnología

|                     |             |
|---------------------|-------------|
| Tecnología          | Sb/Ca       |
| Carga recomendada   | 10A         |
| Performance Marking | W2-C2-V2-E1 |

#### Tipo de terminal

##### T1


Standard DIN Post

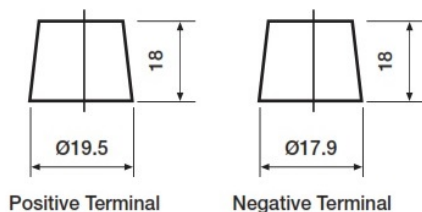

Positive Terminal

Negative Terminal

#### Esquema

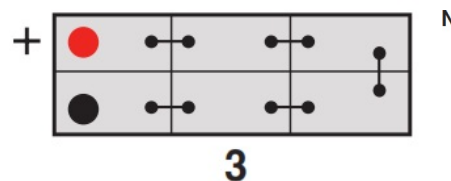

#### Fijación



Fecha de emisión: 30/11/2021 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX1625 - Super Heavy Duty Battery

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 200Ah |
| Cold Cranking Amps (EN1) | 1100A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 513mm |
| Width  | 274mm |
| Height | 242mm |



#### Weights & Measures

|                       |      |
|-----------------------|------|
| Mean Weight with Acid | 55kg |
|-----------------------|------|

#### Container Features

|             |             |
|-------------|-------------|
| Case Type   | DIN C       |
| Cell Layout | 3           |
| Hold Down   | N           |
| Handles     | ✓           |
| Lid Type    | Raised Plug |


#### Technology

|                         |             |
|-------------------------|-------------|
| Technology              | Sb/Ca       |
| Recommended Charge Rate | 10A         |
| Performance Marking     | W2-C2-V2-E1 |

#### Terminal Type

##### T1


Standard DIN Post

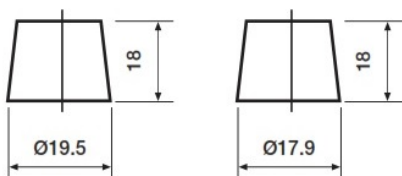

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

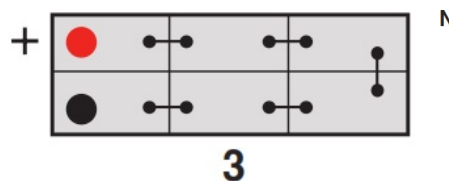

#### Battery Hold-down



Data Sheet generated on 30/11/2021 - E&OE