



Yuasa Ficha Técnica

Yuasa YBX3012 - YBX3000 SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

Tensión	12V
Capacidad (20 horas)	52Ah
Capacidad Arranque Amperios (EN1)	450A

Dimensiones

Largo	207mm
Ancho	175mm
Alto	190mm

Peso

Peso con Acido	13.3kg
----------------	--------



Características

Tipo de Caja	L1 DIN
Fijación	B13/B14
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF doble tapa


Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Prueba de vuelco de VDA	✓
Carga recomendada	3A
Performance Marking	W3-C2-V2-E1


Tipo de terminal

T1

Standard DIN Post

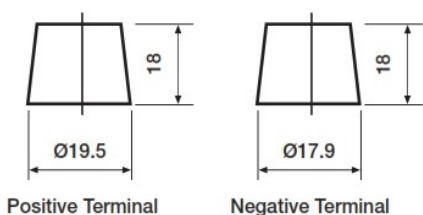

Esquema

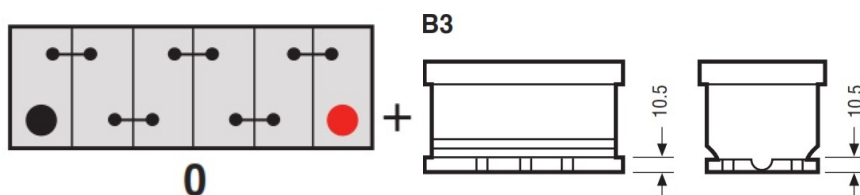

Fijación

Fecha de emisión: 24/05/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3012 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	52Ah
Cold Cranking Amps (EN1)	450A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	13.3kg
-----------------------	--------



Container Features

Case Type	L1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	3A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

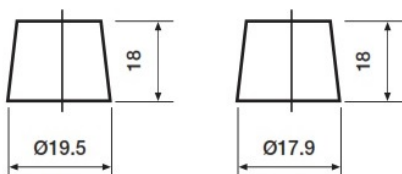

Positive Terminal

Negative Terminal


Cell Assembly Layout

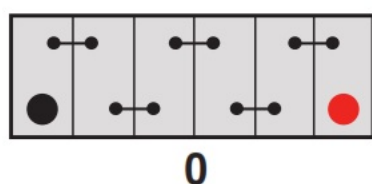

0

Battery Hold-down

B3

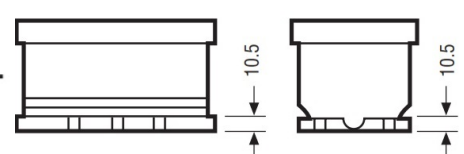

Data Sheet generated on 24/05/2024 - E&OE