



Yuasa Ficha Técnica

Yuasa YBX3014 - YBX3000 SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

Tensión	12V
Capacidad (20 horas)	60Ah
Capacidad Arranque Amperios (EN1)	500A

Dimensiones

Largo	232mm
Ancho	175mm
Alto	225mm

Peso

Peso con Acido	15.5kg
----------------	--------



Características

Tipo de Caja	JIS D23
Borne	1
Fijación	N
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF doble tapa


Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Prueba de vuelco de VDA	✓
Carga recomendada	4A
Performance Marking	W3-C2-V2-E1

Tipo de terminal

T1


Standard DIN Post

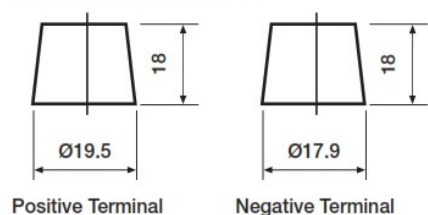

Positive Terminal

Negative Terminal

Esquema

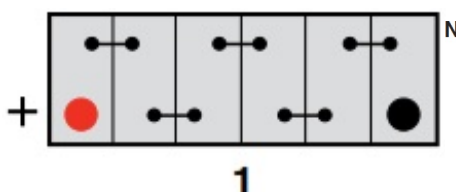

Fijación



Fecha de emisión: 25/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3014 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	500A

Dimensions

Length	232mm
Width	175mm
Height	225mm

Weights & Measures

Mean Weight with Acid	15.5kg
-----------------------	--------



Container Features

Case Type	JIS D23
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

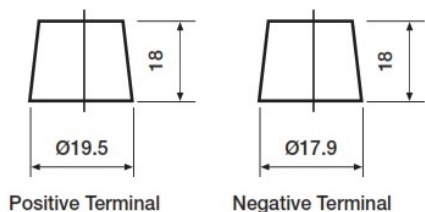

Cell Assembly Layout

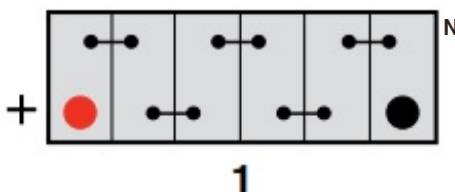

Battery Hold-down



Data Sheet generated on 25/04/2024 - E&OE