



## Yuasa Ficha Técnica

Yuasa YBX3030 - YBX3000 SMF

### Rendimiento

|                      |      |
|----------------------|------|
| Tensión              | 12V  |
| Capacidad (20 horas) | 72Ah |
| Capacidad Arranque   | 630A |
| Amperios (EN1)       |      |

### Dimensiones

|       |       |
|-------|-------|
| Largo | 260mm |
| Ancho | 174mm |
| Alto  | 225mm |

### Peso

|                |        |
|----------------|--------|
| Peso con Acido | 18.4kg |
|----------------|--------|



### Características

|                    |                |
|--------------------|----------------|
| Tipo de Caja       | JIS D26        |
| Fijación           | N              |
| Indicador de Carga | ✓              |
| Asas               | ✓              |
| Respiradero        | ✓              |
| Sellada            | SMF doble tapa |

### Tecnología

|                         |             |
|-------------------------|-------------|
| Regulador gases         | ✓           |
| Tecnología              | Ca/Ca       |
| Separadores             | PE          |
| Prueba de vuelco de VDA | ✓           |
| Carga recomendada       | 4A          |
| Performance Marking     | W3-C2-V2-E1 |



### Tipo de terminal

### Esquema

### Fijación

#### T1

Standard DIN Post

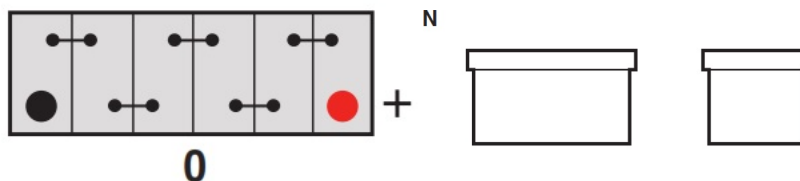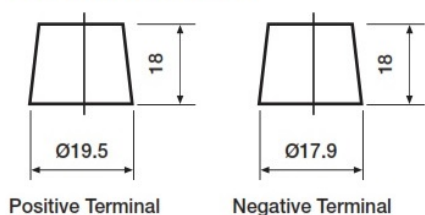

Fecha de emisión: 19/04/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3030 - YBX3000 SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 72Ah |
| Cold Cranking Amps (EN1) | 630A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 260mm |
| Width  | 174mm |
| Height | 225mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 18.4kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS D26        |
| Hold Down                 | N              |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| VDA Roll Over Test      | ✓           |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V2-E1 |


#### Terminal Type

##### T1

Standard DIN Post

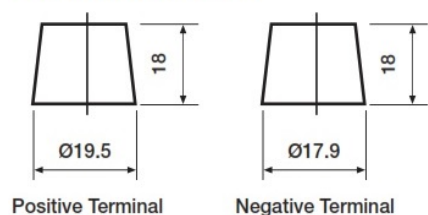

#### Cell Assembly Layout

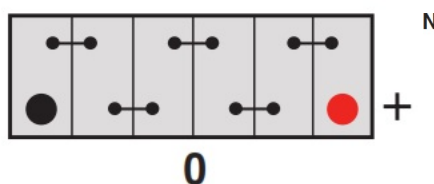

#### Battery Hold-down



Data Sheet generated on 19/04/2024 – E&OE