



Yuasa Ficha Técnica

Yuasa YBX3100 - YBX3000 SMF

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

Tensión	12V
Capacidad (20 horas)	71Ah
Capacidad Arranque Amperios (EN1)	680A

Dimensiones

Largo	278mm
Ancho	175mm
Alto	175mm



Peso

Peso con Acido	17.1kg
----------------	--------

Características

Tipo de Caja	LB3 DIN
Fijación	B13/B14
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF doble tapa

Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Prueba de vuelco de VDA	✓
Carga recomendada	4A
Performance Marking	W3-C2-V2-E1



Tipo de terminal

Esquema


Fijación

T1

Standard DIN Post

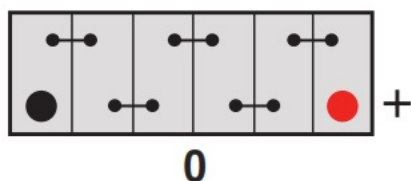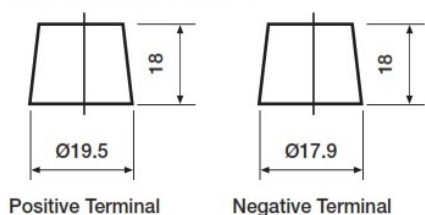

B3/B4 (B3 with Hold-Down adaptor)

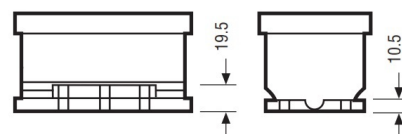

Fecha de emisión: 27/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3100 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	71Ah
Cold Cranking Amps (EN1)	680A

Dimensions

Length	278mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	17.1kg
-----------------------	--------



Container Features

Case Type	LB3 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

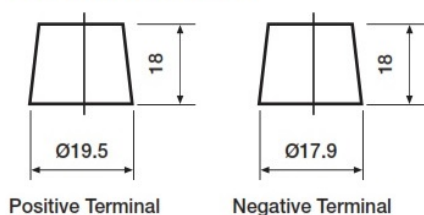


Cell Assembly Layout

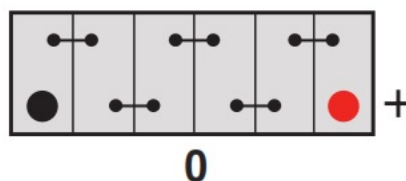

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

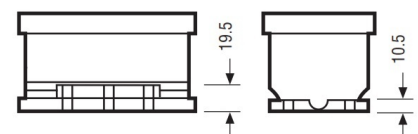

Data Sheet generated on 27/04/2024 – E&OE