



## Yuasa Ficha Técnica

### Yuasa YBX3665 - Super Heavy Duty Battery

#### Rendimiento

|                      |       |
|----------------------|-------|
| Tensión              | 12V   |
| Capacidad (20 horas) | 112Ah |
| Capacidad Arranque   | 870A  |
| Amperios (EN1)       |       |

#### Dimensiones

|       |       |
|-------|-------|
| Largo | 346mm |
| Ancho | 173mm |
| Alto  | 234mm |

#### Peso

|                |        |
|----------------|--------|
| Peso con Acido | 25.5kg |
|----------------|--------|



#### Características

|              |                      |
|--------------|----------------------|
| Tipo de Caja | Euro Compact Low D2A |
| Fijación     | B1                   |
| Asas         | ✓                    |
| Sellada      | Tapa plana           |


#### Tecnología

|                     |             |
|---------------------|-------------|
| Regulador gases     | ✓           |
| Tecnología          | Ca/Ca       |
| Carga recomendada   | 6A          |
| Performance Marking | W3-C2-V3-E2 |


#### Tipo de terminal

##### T1

Standard DIN Post

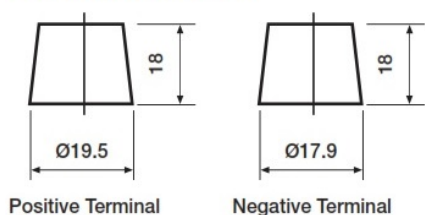

#### Esquema

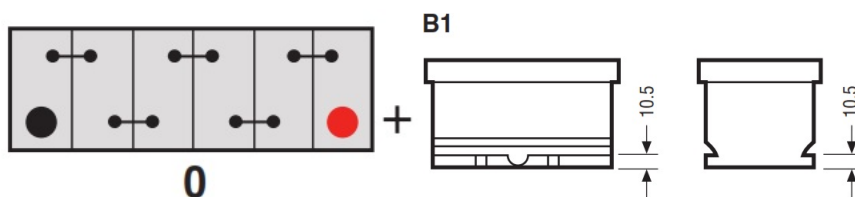

#### Fijación

Fecha de emisión: 26/04/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3665 - Super Heavy Duty Battery

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 112Ah |
| Cold Cranking Amps (EN1) | 870A  |

#### Dimensions

|        |       |
|--------|-------|
| Length | 346mm |
| Width  | 173mm |
| Height | 234mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 25.5kg |
|-----------------------|--------|



#### Container Features

|           |                      |
|-----------|----------------------|
| Case Type | Euro Compact Low D2A |
| Hold Down | B1                   |
| Handles   | ✓                    |
| Lid Type  | Flat Lid             |

#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Recommended Charge Rate | 6A          |
| Performance Marking     | W3-C2-V3-E2 |



#### Terminal Type

#### Cell Assembly Layout


#### Battery Hold-down

##### T1

Standard DIN Post

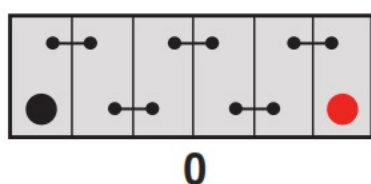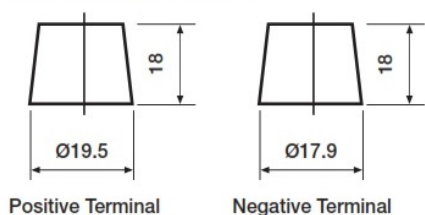

B1

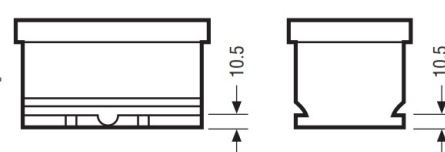

Data Sheet generated on 26/04/2024 - E&OE