



Yuasa Ficha Técnica

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5020 - YBX5000 Silver High Performance SMF

Rendimiento

| | |
|-----------------------------------|-------|
| Tensión | 12V |
| Capacidad (20 horas) | 110Ah |
| Capacidad Arranque Amperios (EN1) | 950A |

Dimensiones

| | |
|-------|-------|
| Largo | 393mm |
| Ancho | 175mm |
| Alto | 190mm |



Peso

| | |
|----------------|--------|
| Peso con Acido | 26.3kg |
|----------------|--------|

Características

| | |
|--------------------|----------------|
| Tipo de Caja | L6 DIN |
| Fijación | B3 |
| Indicador de Carga | ✓ |
| Asas | ✓ |
| Respiradero | ✓ |
| Sellada | SMF doble tapa |


Tecnología

| | |
|-------------------------|-------------|
| Regulador gases | ✓ |
| Tecnología | Ca/Ca |
| Separadores | PE |
| Prueba de vuelco de VDA | ✓ |
| Carga recomendada | 6A |
| Performance Marking | W4-C2-V3-E1 |

Tipo de terminal

T1


Standard DIN Post

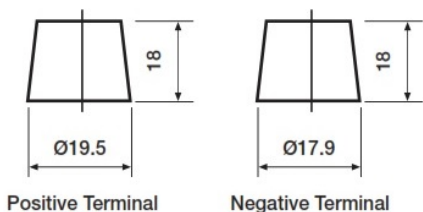

Positive Terminal

Negative Terminal

Esquema

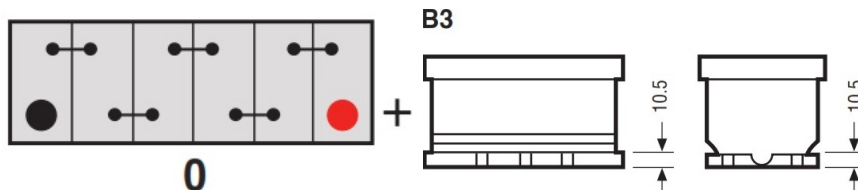

Fijación

Fecha de emisión: 14/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 110Ah |
| Cold Cranking Amps (EN1) | 950A |

Dimensions

| | |
|--------|-------|
| Length | 393mm |
| Width | 175mm |
| Height | 190mm |



Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 26.3kg |
|-----------------------|--------|

Container Features

| | |
|---------------------------|----------------|
| Case Type | L6 DIN |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 6A |
| Performance Marking | W4-C2-V3-E1 |

Terminal Type

T1


Standard DIN Post

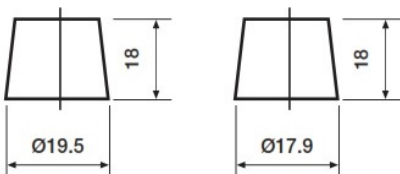


Positive Terminal

Negative Terminal

Cell Assembly Layout

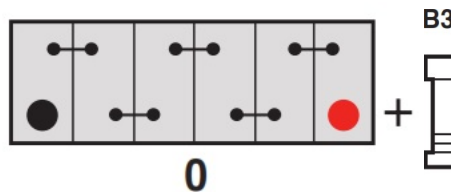

Battery Hold-down

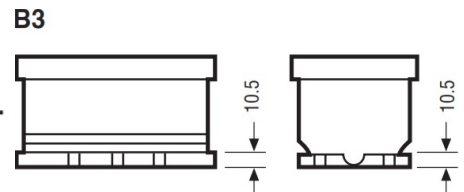

Data Sheet generated on 14/04/2024 - E&OE

