



Yuasa Ficha Técnica

Yuasa YBX5063 - YBX5000 Silver High Performance SMF

Rendimiento

Tensión	12V
Capacidad (20 horas)	52Ah
Capacidad Arranque Amperios (EN1)	520A

Dimensiones

Largo	207mm
Ancho	175mm
Alto	175mm

Peso

Peso con Acido	12.4kg
----------------	--------



Características

Tipo de Caja	LB1 DIN
Fijación	B13/B14
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF doble tapa


Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Prueba de vuelco de VDA	✓
Carga recomendada	3A
Performance Marking	W4-C2-V3-E1

Tipo de terminal

T1


Standard DIN Post

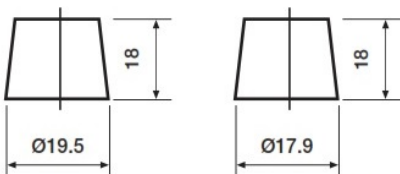

Positive Terminal


Negative Terminal

Esquema

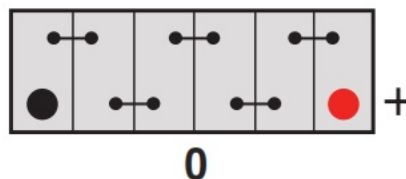

Fijación

B3/B4 (B3 with Hold-Down adaptor)

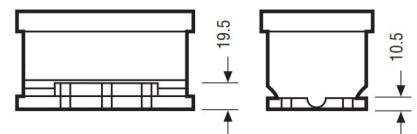

Fecha de emisión: 26/03/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5063 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	52Ah
Cold Cranking Amps (EN1)	520A

Dimensions

Length	207mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	12.4kg
-----------------------	--------



Container Features

Case Type	LB1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

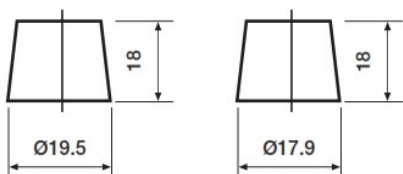

Positive Terminal


Negative Terminal

Cell Assembly Layout

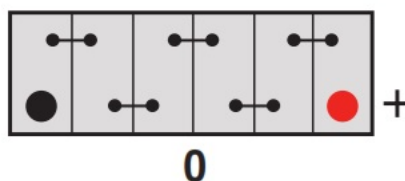

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

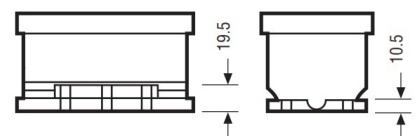

Data Sheet generated on 26/03/2025 - E&OE