



Yuasa Ficha Técnica

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

| | |
|-----------------------------------|------|
| Tensión | 12V |
| Capacidad (20 horas) | 80Ah |
| Capacidad Arranque Amperios (EN1) | 800A |

Dimensiones

| | |
|-------|-------|
| Largo | 317mm |
| Ancho | 175mm |
| Alto | 190mm |

Peso

| | |
|----------------|--------|
| Peso con Acido | 23.2kg |
|----------------|--------|



Características

| | |
|------------------------------|------------|
| Tipo de Caja | L4 DIN AGM |
| Fijación | B3 |
| Asas | ✓ |
| Respiradero | ✓ |
| Características Semitraccion | ✓ |
| Sellada | VRLA |


Tecnología

| | |
|-------------------------|-------------|
| Regulador gases | ✓ |
| Tecnología | Ca/Ca VRLA |
| Separadores | AGM |
| Prueba de vuelco de VDA | ✓ |
| Carga recomendada | 5A |
| Performance Marking | W5-C2-V3-M3 |

Tipo de terminal

T1


Standard DIN Post

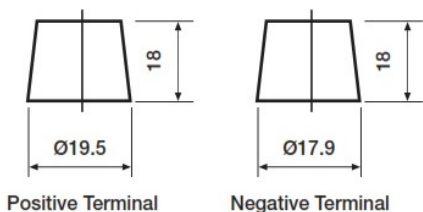

Positive Terminal

Negative Terminal

Esquema

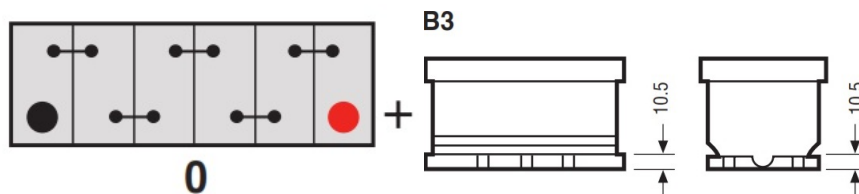

Fijación

Fecha de emisión: 11/08/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 80Ah |
| Cold Cranking Amps (EN1) | 800A |

Dimensions

| | |
|--------|-------|
| Length | 317mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 23.2kg |
|-----------------------|--------|

Container Features

| | |
|------------------------|------------|
| Case Type | L4 DIN AGM |
| Hold Down | B3 |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |

Technology

| | |
|---------------------------|----------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca VRLA AGM |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 5A |
| Performance Marking | W5-C2-V3-M3 |

Terminal Type

Cell Assembly Layout

Battery Hold-down

Data Sheet generated on 11/08/2024 – E&OE

