



Yuasa Ficha Técnica

Yuasa YBX5100 - YBX5000 Silver High Performance SMF

Rendimiento

Tensión	12V
Capacidad (20 horas)	75Ah
Capacidad Arranque	710A
Amperios (EN1)	

Dimensiones

Largo	278mm
Ancho	175mm
Alto	175mm



Peso

Peso con Acido	17.6kg
----------------	--------

Características

Tipo de Caja	LB3 DIN
Fijación	B13/B14
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF doble tapa

Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
Prueba de vuelco de VDA	✓
Carga recomendada	4A
Performance Marking	W4-C2-V3-E1



Tipo de terminal

Esquema


Fijación

T1

Standard DIN Post

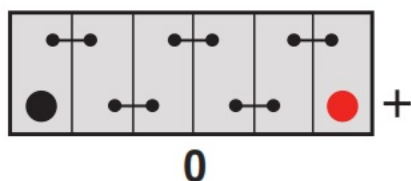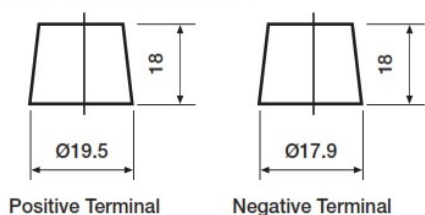

B3/B4 (B3 with Hold-Down adaptor)

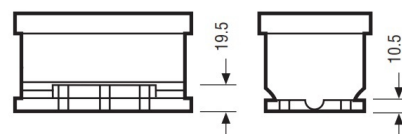

Fecha de emisión: 28/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5100 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	75Ah
Cold Cranking Amps (EN1)	710A

Dimensions

Length	278mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	17.6kg
-----------------------	--------



Container Features

Case Type	LB3 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1

Standard DIN Post

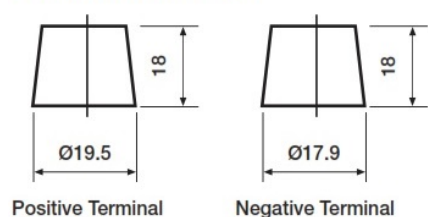


Cell Assembly Layout

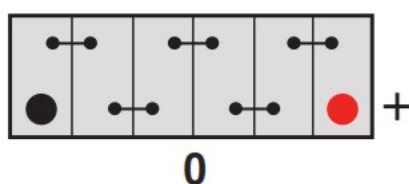

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

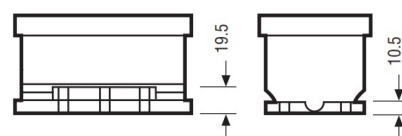

Data Sheet generated on 28/04/2024 - E&OE